


01

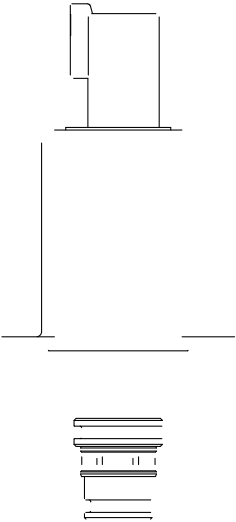

	0.235Kg
MTTF _d	150
	-30~80


	P _p = 60bar
	P _r = 30bar
	NAS1638 9 ISO4406 20/18/15
	DIN 51524
	-30~105
	< 100mL/min
	< 100mL/min
	140µm P

	24 V
20	34 Ω
	DT04-2P Deutsch
	IP6K6/IPX9K
	<40ms
	<40ms


HLP46 T=50


01


P→A

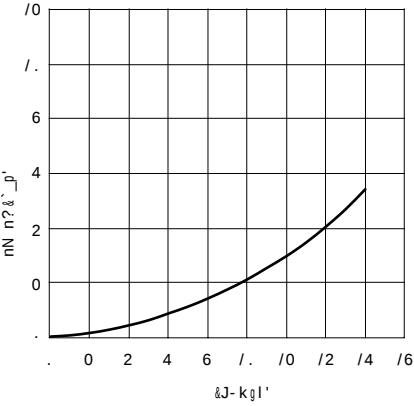

A→T

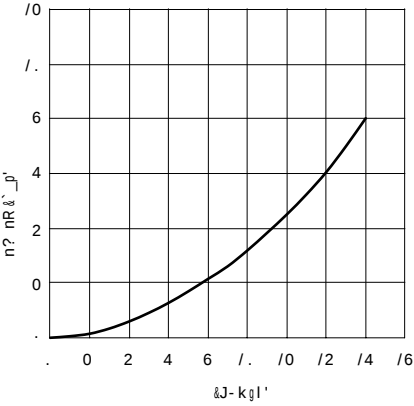

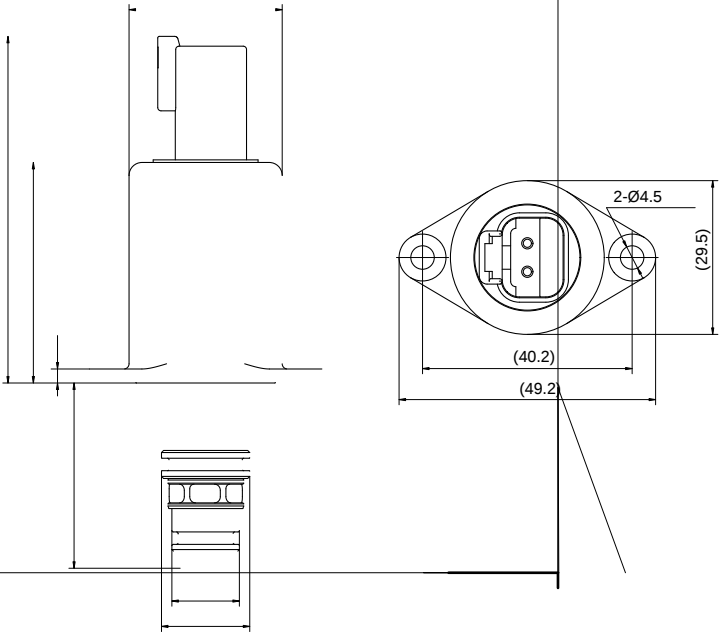

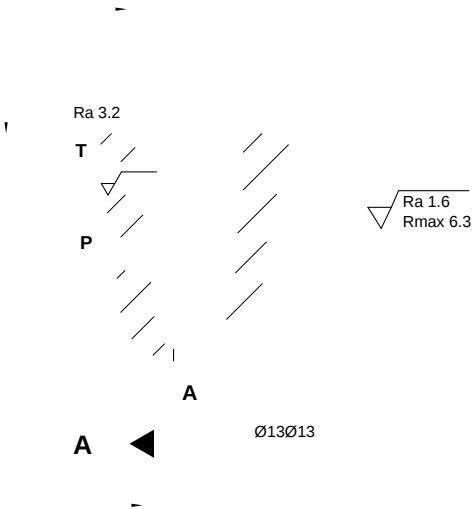

2.1	HLTS58-20	079-084
2.2	HLTS58-21F	085-090
2.3	PPRV-04	091-096
2.4	PPRV-05	097-102

