

3.1



HBK series

Hydraulic brake

The HBK series brakes are normally-o f oil wet static hydraulic brakes, which utilize spring action to produce the braking force, while oil pressure is used to release the brake.

Contents

Overview	02
Advantages	02
Standard structure	02
Speci f cation	03
Ordering information	04
Installation size	05
Shaft end dimensions	05
Allowable shaft load/bearing curve	06
Hydraulic diagram	06

The HBK series brakes are normally-off oil wet static hydraulic brakes, which utilize spring action to produce the braking force, while oil pressure is used to release the brake.

- A combination of roller bearings and needle roller bearings ensure a high-strength load capacity.
- It features unique friction-resistant materials and a high-strength spring design, allowing for a long service life and high braking reliability.

Specification

Type	HBK1150	HBK1500
Min. static torque (N · m)	1150	1500
Brake release pressure (bar)	28	
Max. release pressure (bar)	250	
Min. amount of brake release oil (cm ³)	11.5	
Max. speed (rpm)	250	
Volume of lubricating oil in brake cavity (cm ³)	180	
Max. working oil temperature ()	82	
Weight (kg)	16.1	17.2

R + . . . 17

Ordering information

HBK	1150	B01	T7	N	N	A

Hydraulic Brake Series

Hydraulic Brake	HBK
-----------------	-----

Static Torque

Static torque(N · m)	1150	1500
----------------------	------	------

Mount, Port

4 × Ø13.1 Round mount, port 7/16-20UNF, rear pilot Ø101.6 × 12.8	B01
--	-----

Output Shaft

Ø38.1 Tapered, parallel key 7.96 × 7 × 31.75	T7
--	----

Rotation Direction

None	N
------	---

Paint Option

No Paint	N
Black	B
Hengli blue	C



Special Features

Standard	A
----------	---

R+ . .2.

Note: When using the order information, the user can select the brake series, static torque, installation fange, port, shaft and other information. If the selected specification is not in the table or has special requirements, please contact us.

T7

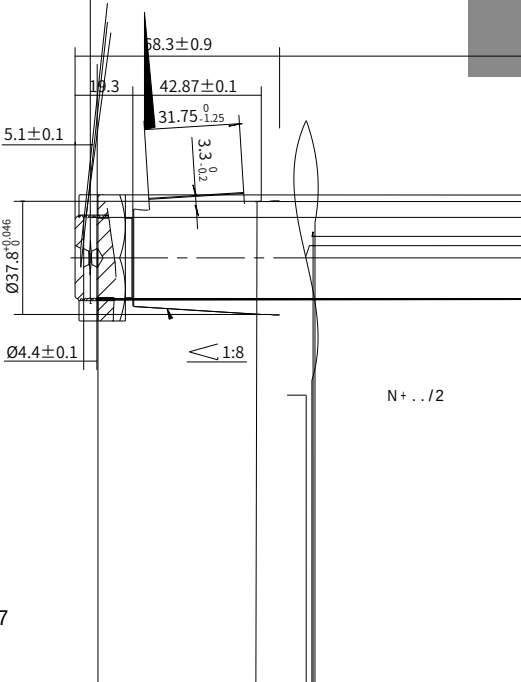


Allowable shaft load/bearing curve

As shown in the figure, when the axial load is 0, the radial allowable load of the output shaft is related to the distance from the flange mounting surface to the load action point.

The solid line shows the allowable radial load of the bearing. It is based on L_{10} bearing life 2000 hrs at 100 RPM with rated output torque.

The dash line shows max radial shaft load. Any shaft load exceeding the values quoted in the curve will involve a risk of failure.

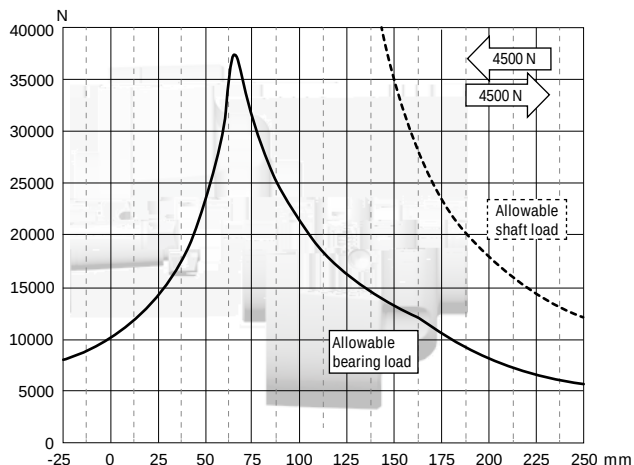

N + . . / 3

N + . . . 3